



φ 250

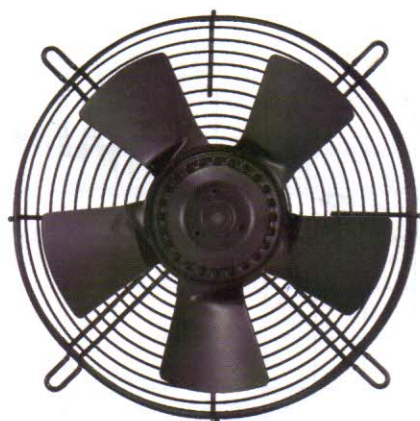




Flow Rate Curve

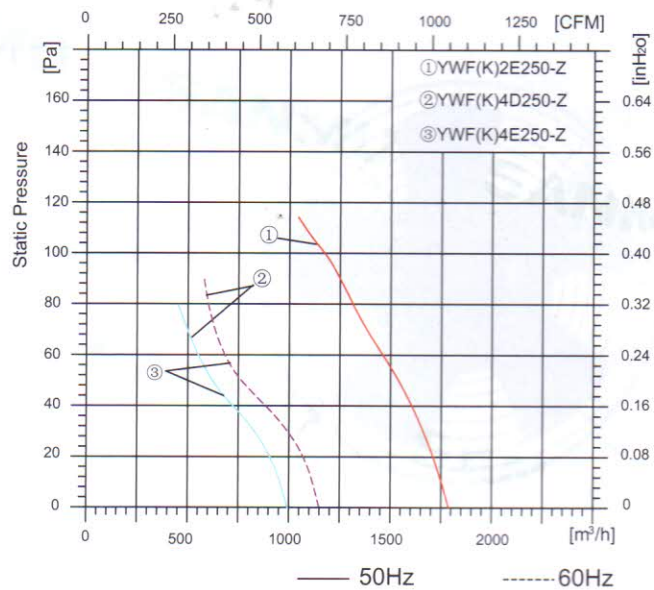

3

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
①	40	50	178	0.76
	90	50	185	0.81

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
②	20	50/60	35/41	0.11/0.13
	50	50/60	38/45	0.11/0.13
③	20	50/60	34/48	0.16/0.23
	50	50/60	36/50	0.17/0.24

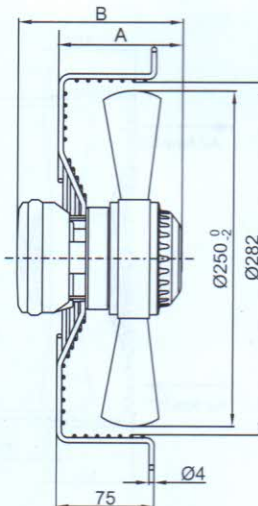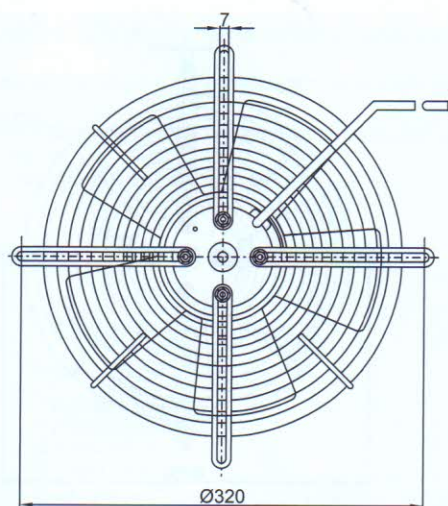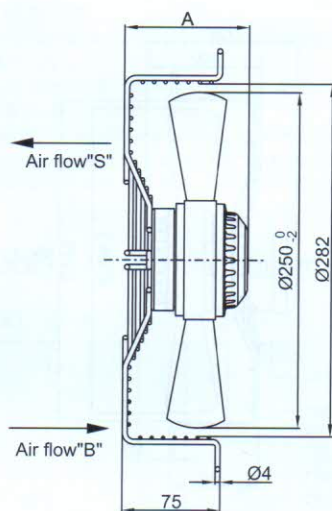

技术参数 Technical Parameter

型号 Model	电压 Voltage (VAC)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m ³ /h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)	A	B
YWF(K)2E250-Z	230	50	180	0.78	1800	2500	4	68	65	3.0	102	134
YWF(K)4E250-Z	230	50/60	50/65	0.22/0.29	1000/1150	1380/1530	1.5	50/55	75	2.5	94	126
YWF(K)4D250-Z	380	50/60	60/70	0.13/0.15	1000/1150	1350/1550	/	50/55	75	2.7	94	126