

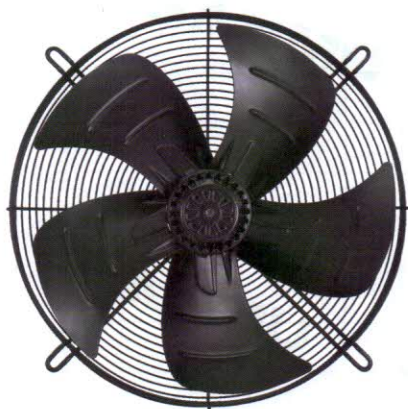


φ 450



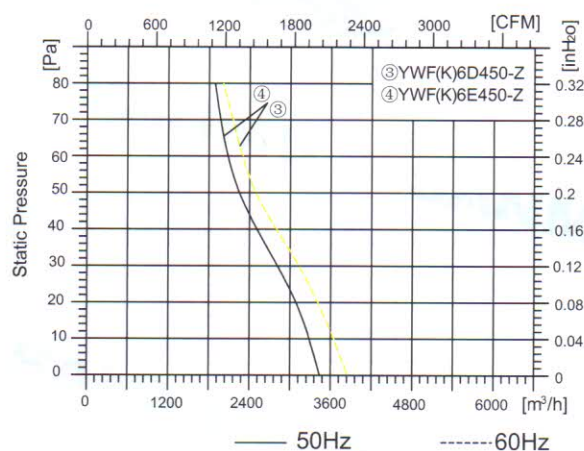


Flow Rate Curve

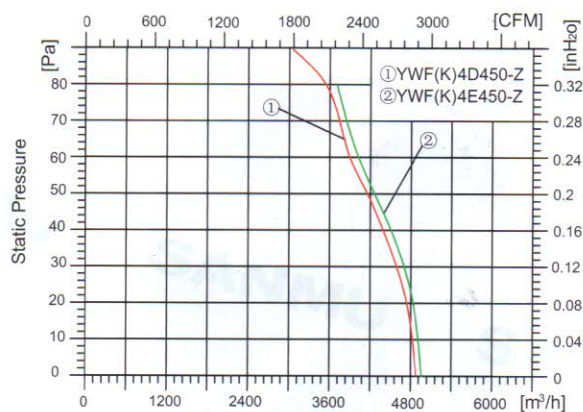

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
①	20	50	250	0.58
	80	50	307	0.65
②	20	50	227	1.0
	80	50	266	1.21

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
③	20	50/60	146/173	0.47/0.45
	60	50/60	170/198	0.46/0.48
④	20	50/60	127/153	0.58/0.67
	60	50/60	150/175	0.68/0.76

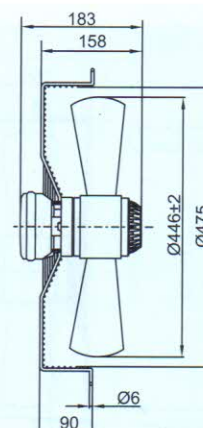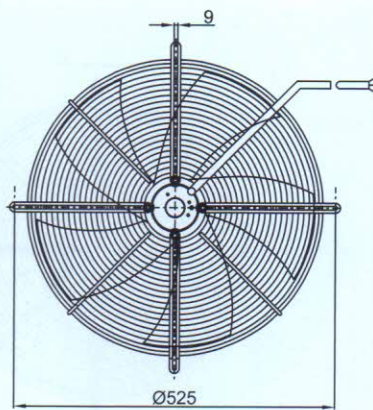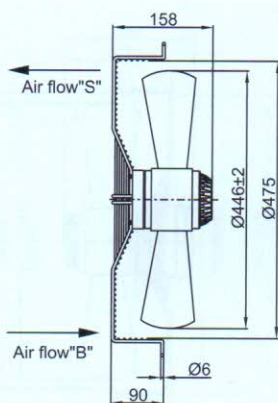

技术参数 Technical Parameter

型 号 Model	电 压 Voltage (VAC)	频 率 Frequency (Hz)	输入功率 Input Power (W)	电 流 Current (A)	风 量 Air Volume (m³/h)	转 速 Speed (r/min)	电 容 Capacitor (μF)	噪 音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重 量 Weight (Kg)
YWF(K)4D450-Z	380	50	250	0.58	5000	1400	/	68	55	6.9
YWF(K)4E450-Z	230	50	250	1.15	5100	1380	8	71	55	6.9
YWF(K)6D450-Z	380	50/60	150/180	0.48/0.46	3450/3850	930/1050	/	62/65	55	6.9
YWF(K)6E450-Z	230	50/60	150/185	0.68/0.82	3450/3850	900/1050	4	60/65	55	6.9