



φ 500



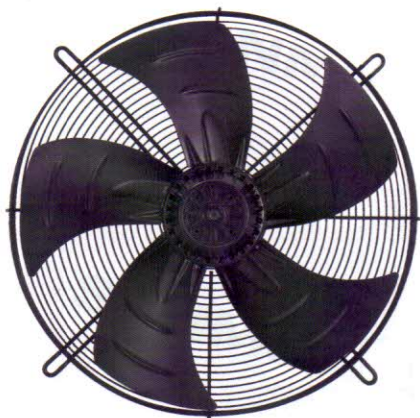


Flow Rate Curve

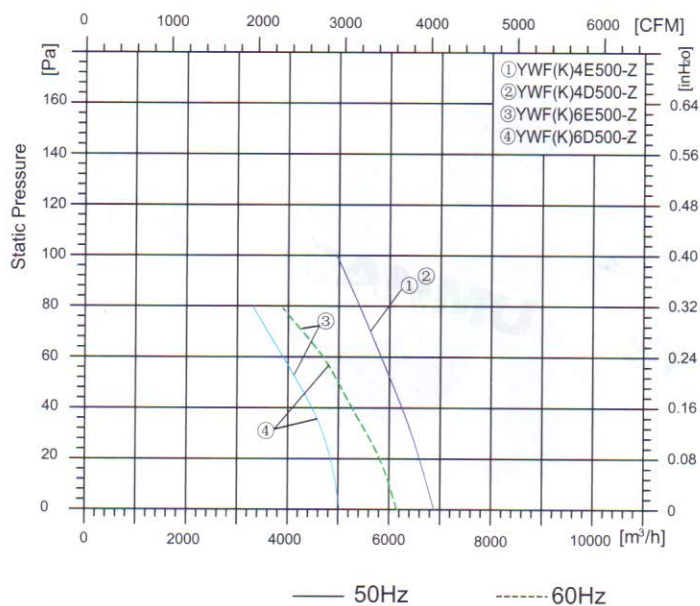

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
①	20	50	361	1.6
	80	50	430	1.90
②	20	50	380	0.82
	80	50	454	0.93

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
③	20	50/60	207/282	1.09/1.22
	80	50/60	230/320	1.15/1.4
④	20	50/60	230/273	0.70/0.57
	60/80	50/60	250/320	0.78/0.65

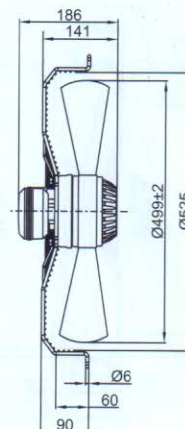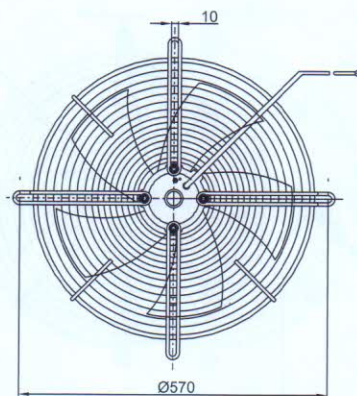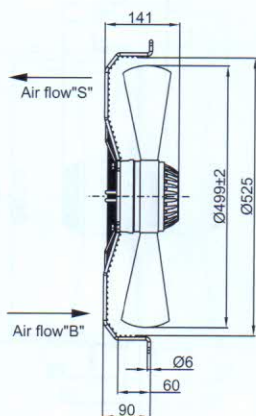

技术参数 Technical Parameter

型 号 Model	电 压 Voltage (VAC)	频 率 Frequency (Hz)	输入功率 Input Power (W)	电 流 Current (A)	风 量 Air Volume (m³/h)	转 速 Speed (r/min)	电 容 Capacitor (μF)	噪 音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重 量 Weight (Kg)
YWF(K)4E500-Z	230	50	420	1.85	6950	1320	12	72	50	9.5
YWF(K)4D500-Z	380	50	450	0.93	7000	1320	/	72	50	9.5
YWF(K)6E500-Z	230	50/60	230/320	1.15/1.4	5200/6150	920/1050	6	67/69	60/50	9.5
YWF(K)6D500-Z	380	50/60	250/320	0.78/0.65	5200/6150	920/1060	/	67/69	60/50	9.5