



φ 350



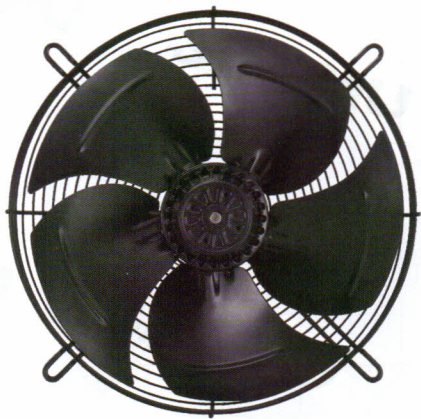


NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
①	30	50	137	0.61
	70	50	148	0.7
②	20	50/60	73/81	0.37/0.36
	40	50/60	77/86	0.38/0.38
③	30	50	130	0.35
	80	50	148	0.37
④	20	50/60	99/95	0.28/0.23
	50	50/60	106/103	0.28/0.23

Flow Rate Curve

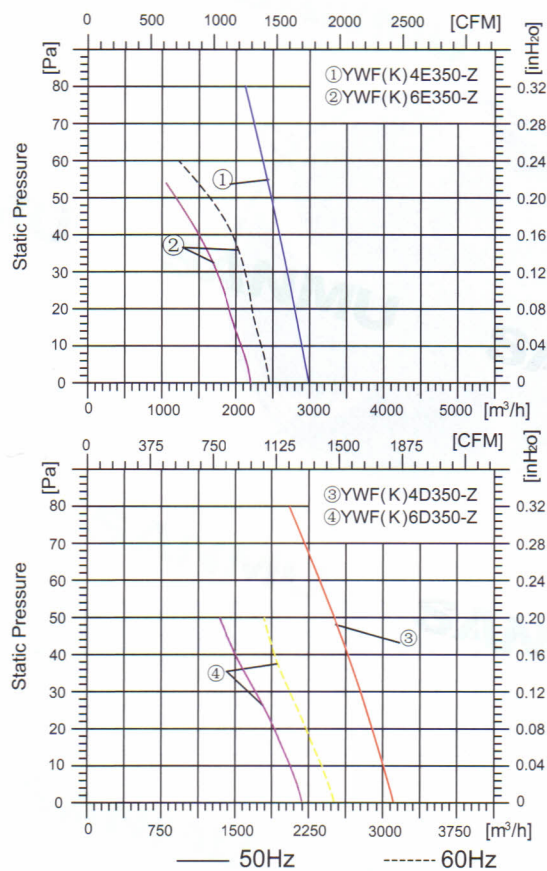

10

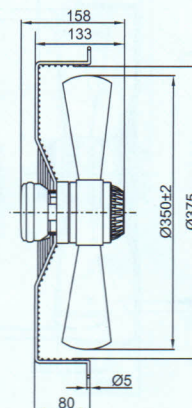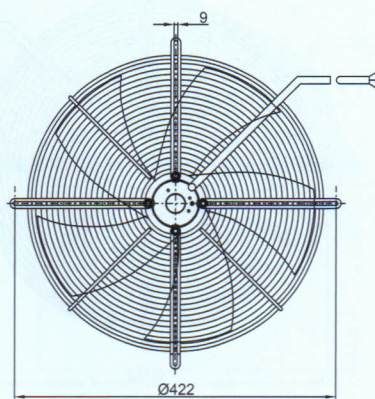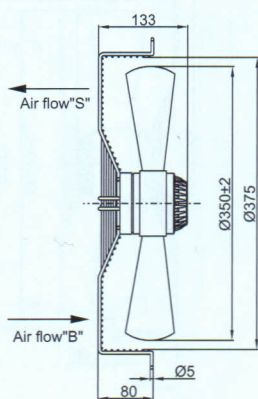

技术参数 Technical Parameter

型号 Model	电压 Voltage (VAC)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4E350-Z	230	50	138	0.68	2980	1370	4	62	65	4.7
YWF(K)4D350-Z	380	50	145	0.37	3110	1390	/	63	65	4.7
YWF(K)6E350-Z	230	50/60	80/95	0.4/0.42	2100/2450	930/1100	2	53/58	65	4.7
YWF(K)6D350-Z	380	50/60	90/95	0.29/0.24	2100/2450	940/1100	/	53/58	65	4.7