



φ 550



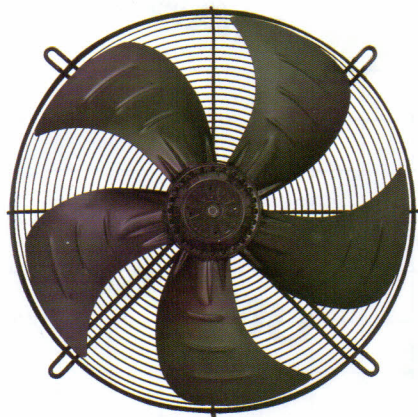


Flow Rate Curve

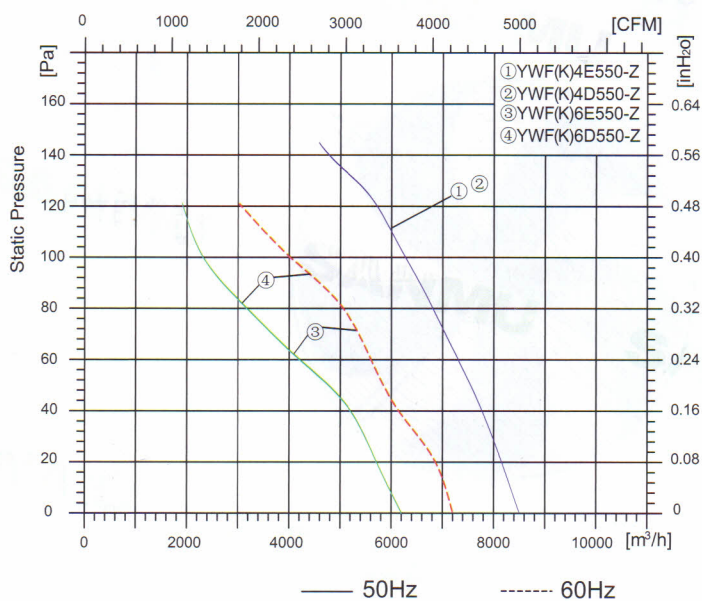

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
①	20	50	451	1.98
	150	50	577	2.48
②	20	50	464	0.95
	180	50	636	1.14

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
③	20	50/60	263/332	1.4/1.48
	110	50/60	330/420	1.68/1.83
④	20	50/60	264/327	0.82/0.76
	100	50/60	330/410	0.87/0.87

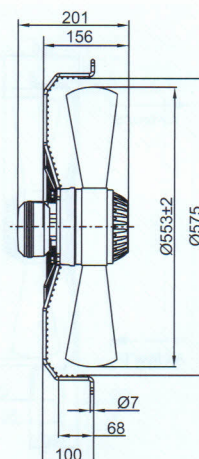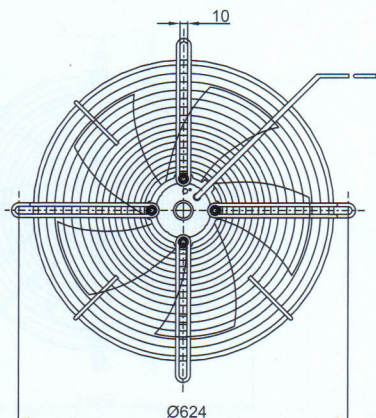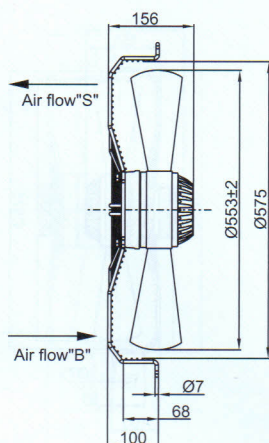

技术参数 Technical Parameter

型号 Model	电压 Voltage (VAC)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重量 Weight (Kg)
YWF(K)4E550-Z	230	50	550	2.45	8500	1310	12	74	50	10.5
YWF(K)4D550-Z	380	50	650	1.2	8500	1300	/	74	50	10.5
YWF(K)6E550-Z	230	50/60	330/420	1.68/1.83	6200/7100	910/1080	10	67/68	60/50	10.5
YWF(K)6D550-Z	380	50/60	330/410	0.87/0.87	6200/7100	900/1070	/	67/68	60/50	10.5