



φ 600

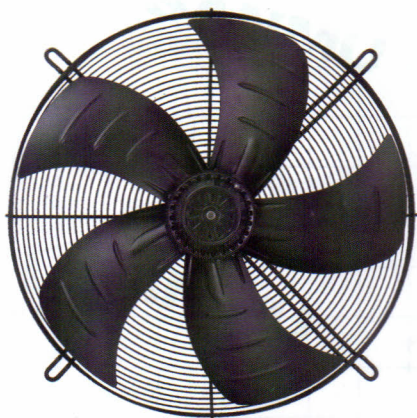




Flow Rate Curve

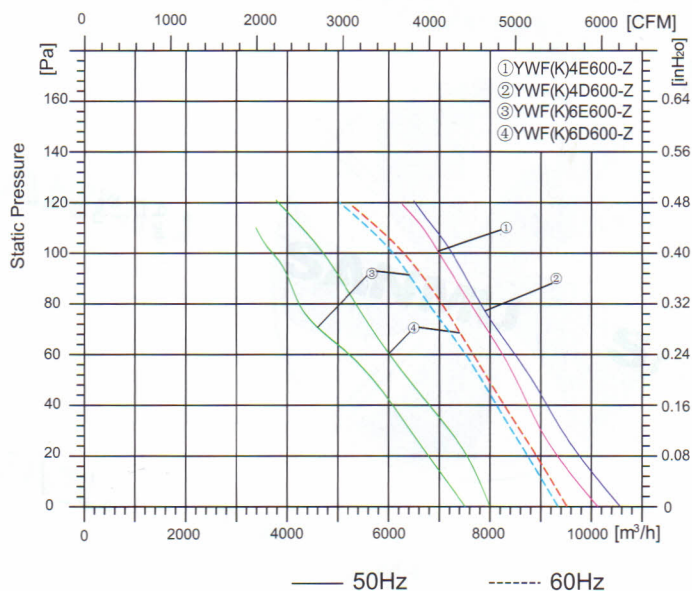

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
①	25	50	783	3.4
	110	50	810	3.5
②	25	50	725	1.83
	110	50	860	1.95

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
③	20	50/60	400/500	1.9/2.2
	110	50/60	500/600	2.2/2.8
④	40	50/60	410/500	1.44/1.22
	160/120	50/60	550/600	1.57/1.3

24

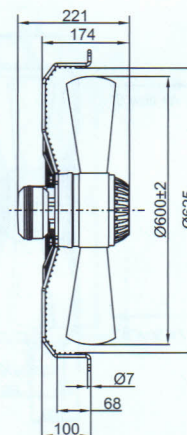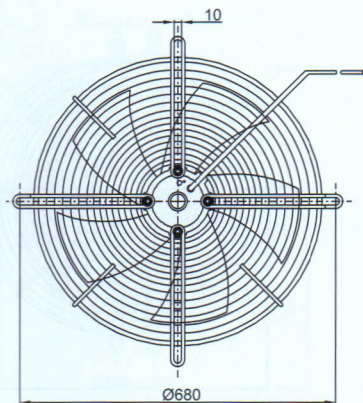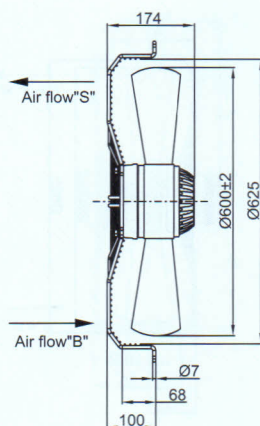

技术参数 Technical Parameter

型 号 Model	电 压 Voltage (VAC)	频 率 Frequency (Hz)	输入功率 Input Power (W)	电 流 Current (A)	风 量 Air Volume (m³/h)	转 速 Speed (r/min)	电 容 Capacitor (μF)	噪 音 Noise [dB(A)]	允许最高环境温度 Max Environmental Temperature (°C)	重 量 Weight (Kg)
YWF(K)4E600-Z	230	50	810	3.5	10300	1315	16	76	50	15
YWF(K)4D600-Z	380	50	860	1.95	10800	1365	/	79	50	15
YWF(K)6E600-Z	230	50/60	500/600	2.2/2.8	7500/9250	900/1030	14	70/71	50	15
YWF(K)6D600-Z	380	50/60	550/600	1.57/1.3	8100/9500	920/1070	/	70/72	50	15