



φ 630

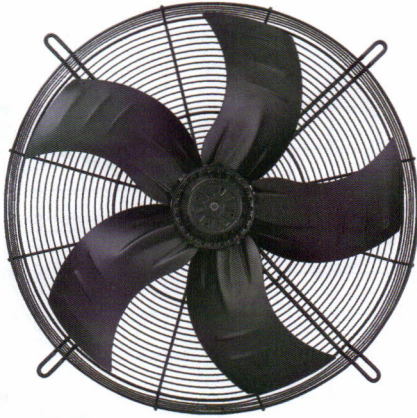

Flow Rate Curve



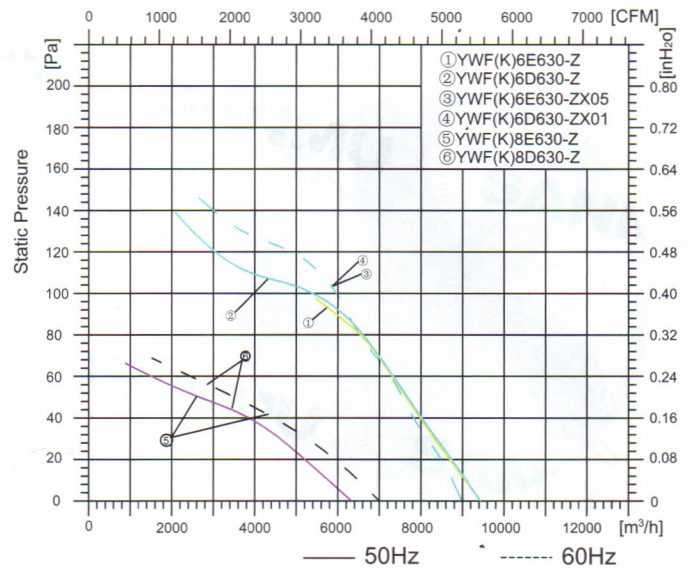


27

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
①	15	50	362	1.75
	110	50	455	2.09
②	15	50	369	1.4
	110	50	485	1.41

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
③	20	60	444	2.0
	120	60	527	2.34
④	20	60	366	1.1
	120	60	550	1.3

NO.	Pst (Pa)	Fre (Hz)	P1 (W)	I (A)
⑤	10	50/60	180/222	0.85/0.98
	40	50/60	200/250	1.0/1.1
⑥	10	50/60	148/184	0.37/0.38
	50	50/60	168/220	0.42/0.47

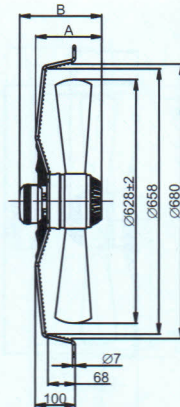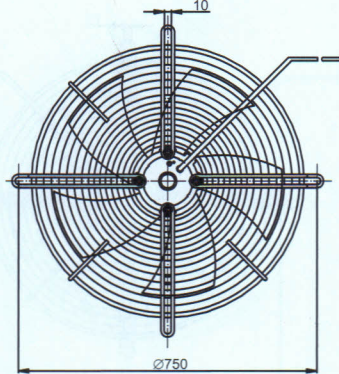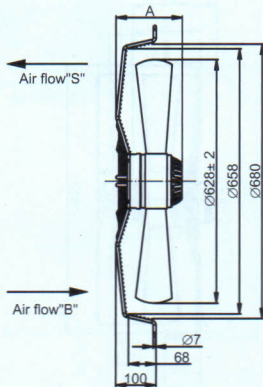

技术参数 Technical Parameter

型号 Model	电压 Voltage (VAC)	频率 Frequency (Hz)	输入功率 Input Power (W)	电流 Current (A)	风量 Air Volume (m³/h)	转速 Speed (r/min)	电容 Capacitor (μF)	噪音 Noise [dB(A)]	允许最高环境温度 Max. Environmental Temperature (°C)	重量 Weight (Kg)	A	B
YWF(K)6E630-Z	230	50	500	2.2	9600	930	14	75	50	15	181	221
YWF(K)6D630-Z	380	50	550	1.57	9580	920	/	75	50	15	181	221
YWF(K)6E630-ZX05	230	60	580	2.6	9000	1050	14	76	60	15	181	221
YWF(K)6D630-ZX01	380	60	550	1.3	9000	1100	/	76	60	15	181	221
YWF(K)8E630-Z	230	50/60	200/250	1.0/1.1	6200/7000	650/710	7	70/71	60	13.2	161	201
YWF(K)8D630-Z	380	50/60	160/200	0.41/0.45	6100/6900	630/680	/	69/70	60	13.2	161	201